

功率訊號轉小訊號 BS3




BS3 規格:

- ★ 輸入頻率 20HZ~100KHZ \pm 3dB
- ★ 最大輸入功率:100W (56Vpp)
- ★ 輸入訊號:輸出訊號約為 4:1
- ★ 隔離電壓:1000V

BS3 功能:

- ★ 隔離原廠主機(安卓主機)與外加裝置(M-ap、DSP、AMP)的接地,有助於隔離電源接地的干擾。例如車上發電機的接地干擾。
- ★ 優化聲音。
- ★ 使用訂製端子。

Power signals to small signals:BS3

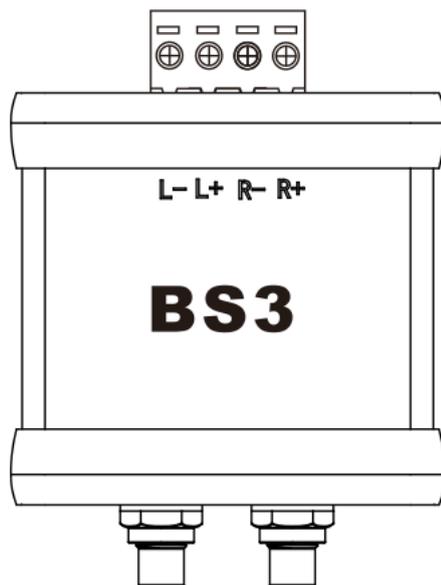

BS3 Standard:

- ★ Input rate:20HZ~100KHZ +-3dB
- ★ Maximum input power:100W (56Vpp)
- ★ Input signal: The output signal is approximately 4:1 specification
- ★ Isolation voltage: 1000V

BS3 function:

- ★ Isolate the ground of the original host (Android host) and the external device (M-AP, DSP, AMP) to help isolate the device Interference from the power supply ground. For example, ground interference from the on-board generator ◦
- ★ Optimize sound ◦
- ★ Use custom terminals ◦